


STA 080

Very reliable product
Full range of colors from 1800K to 6500K
SDCM<3 CRI>90
3M double-sided tape

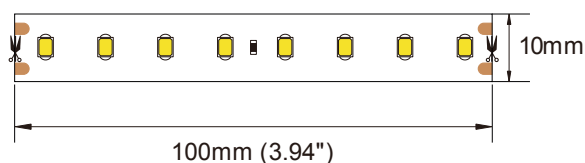

STA 07W 080 IP20 . 927

Model Power LED nr. IP grade CCT

Model	CCT	
STA	927	2700K
	930	3000K
	940	4000K
Power	950	5000K
	960	6000K

LED Nr.
080 [led/m]

IP grade
IP20
IP65
IP67
IP68

Accessories

Connection kit IP67 (white strip)	ACC00028
Set off 5 mounting clips	ACC00029

Features

LED type	SMD2835
LED nr.	80LEDs/m
Standard CCT	2700K/3000K/4000K/5000K/6000K
Other CCT upon request	1800K/2100K/2300K/6500K
Beam angle	120°

Performance

Lumen output (at 85°C)	860 — 980lm/m (262 — 298lm/ft)
Color rendering index	>90
Efficacy	119 — 136lm/W

Electrical and control

Supply type	Constant voltage
Input voltage	DC24V
Input current	0.3A/m (0.09A/ft)
Max. power consumption	7.2W/m (2.3W/ft)
Dimming	External

Physical

Minimum cut	100mm (3.94")
Reel length	5m (16.40')
Weight	0.05kg/m
Operating temperature	-25/+55°C
ESD Protection	+/- 2000V

